




Suppliers of Quality Assured Cables

Flexible Wiring Cable - Flexible CSP Test Leads

Product Type:

Flexible Cable

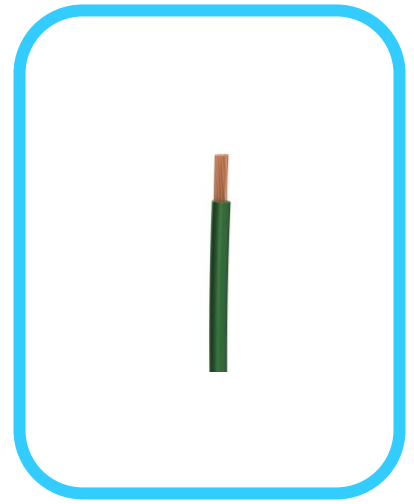

Application:

Flexible leads used mainly as a flexible connection to or from test equipment.

Standards / Conformances:

REACH and RoHS Compliant

Construction:

Conductor:	Tinned annealed copper to EN60228 Class 6
Insulation:	Flexible CSP (Chlorosulfonated Polyethylene rubber) Various colours

Electrical Characteristics:

Max Voltage 1000V

Physical Characteristics:

Maximum temperature 70°C

Part Number	Colour	Length	Conductor Strand	Nom cable diameter /mm	Max. Conductor DC Resistance at 20°C (Ω/Km)
6009342	Red	25m	55/0.15mm	4.0	20.0
6009343	Black	25m	55/0.15mm	4.0	20.0